


Rivet

Example part number



N Rivet Head and Rivet Types

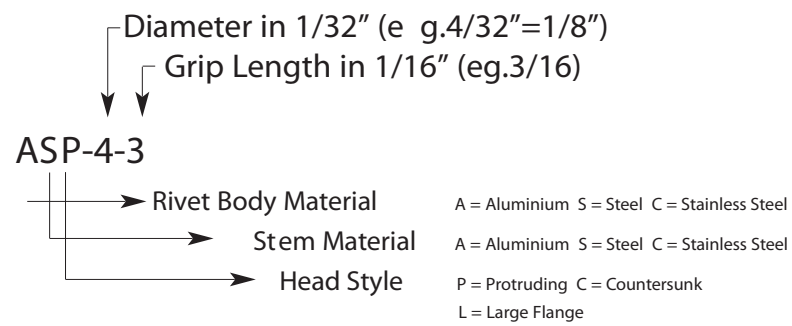





SRØ1 Aluminium Body Material
Steel Stem Zinc Plated










ASP Aluminium Body Material
Steel Stem Zinc Plated













SSP Steel Body Material
Steel Stem Zinc Plated















CCP Stainless Steel Body Material
Stainless Steel stem

AAP Aluminium Body Material
Aluminium Stem


No. 3		Rivet Diameter 3/32" or 2.4mm Hole size = 2.5mm	Diam. and Grip Code	Grip Range		Shell Size inches
				Inches	mm	
			3-2	Up to .125	Up to 3.2	$\frac{3}{32} \times \frac{7}{32}$
			3-4	.126 .250	3.2 6.4	$\frac{3}{32} \times \frac{9}{32}$
			3-6	.251 .375	4.8 9.5	$\frac{3}{32} \times \frac{11}{32}$

No. 5		Rivet Diameter 5/32" or 4.0mm Hole size = 4.1mm	Diam. and Grip Code	Grip Range		Shell Size inches
				Inches	mm	
			5-1	Up to .062	Up to 1.6	$\frac{5}{32} \times \frac{7}{32}$
			5-2	.63 .125	1.6 3.2	$\frac{5}{32} \times \frac{9}{32}$
			5-3	.126 .187	3.2 4.8	$\frac{5}{32} \times \frac{11}{32}$
			5-4	.188 .250	4.8 6.4	$\frac{5}{32} \times \frac{13}{32}$
			5-5	.251 .312	6.4 7.9	$\frac{5}{32} \times \frac{15}{32}$
			5-6	.313 .375	7.9 9.5	$\frac{5}{32} \times \frac{17}{32}$
			5-8	.376 .500	9.5 12.7	$\frac{5}{32} \times \frac{21}{32}$
			5-10	.501 .625	12.7 15.9	$\frac{5}{32} \times \frac{25}{32}$

No. 4		Rivet Diameter 1/8" or 3.2mm Hole size = 3.3mm	Diam. and Grip Code	Grip Range		Shell Size inches
				Inches	mm	
			4-1	Up to .062	Up to 1.6	$\frac{1}{8} \times \frac{3}{16}$
			4-2	.63 .125	1.6 3.2	$\frac{1}{8} \times \frac{1}{4}$
			4-3	.126 .187	3.2 4.8	$\frac{1}{8} \times \frac{5}{16}$
			4-4	.188 .250	4.8 6.4	$\frac{1}{8} \times \frac{3}{8}$
			4-5	.251 .312	6.4 7.9	$\frac{1}{8} \times \frac{7}{16}$
			4-6	.313 .375	7.9 9.5	$\frac{1}{8} \times \frac{1}{2}$
			4-7	.376 .437	9.5 11.0	$\frac{1}{8} \times \frac{9}{16}$
			4-8	.438 .500	11.0 12.7	$\frac{1}{8} \times \frac{5}{8}$
			4-9	.501 .562	12.7 14.3	$\frac{1}{8} \times \frac{11}{16}$
			4-10	.563 .625	14.3 15.9	$\frac{1}{8} \times \frac{3}{4}$
			4-12	.625 .750	15.9 19.0	$\frac{1}{8} \times \frac{7}{8}$

No. 6		Rivet Diameter 3/16" or 4.8mm Hole size = 4.9mm	Diam. and Grip Code	Grip Range		Shell Size inches
				Inches	mm	
			6-1	Up to .062	Up to 1.6	$\frac{3}{16} \times \frac{9}{32}$
			6-2	.063 .125	1.6 3.2	$\frac{3}{16} \times \frac{11}{32}$
			6-3	.126 .187	3.2 4.8	$\frac{3}{16} \times \frac{13}{32}$
			6-4	.188 .250	4.8 6.4	$\frac{3}{16} \times \frac{15}{32}$
			6-5	.251 .312	6.4 7.9	$\frac{3}{16} \times \frac{17}{32}$
			6-6	.313 .375	7.9 9.5	$\frac{3}{16} \times \frac{19}{32}$
			6-7	.376 .452	9.5 11.5	$\frac{3}{16} \times \frac{23}{32}$
			6-8	.376 .500	9.5 12.7	$\frac{3}{16} \times \frac{23}{32}$
			6-10	.501 .625	12.7 15.9	$\frac{3}{16} \times \frac{27}{32}$
			6-12	.626 .750	15.9 19.0	$\frac{3}{16} \times \frac{31}{32}$
			6-14	.751 .875	19.0 22.2	$\frac{3}{16} \times \frac{1}{2}$
			6-16	.876 1.000	22.2 25.4	$\frac{3}{16} \times \frac{7}{8}$
			6-20	1.000 1.375	25.4 34.9	$\frac{3}{16} \times \frac{15}{8}$

SR01 - Dome Head



Part Number	Grip Range			
	min		max	
	Inches	mm	Inches	mm
OSR01-03265		.00	.059	1.5
OSR01-03280	.078	2.0	.157	4.0
OSR01-03295	.137	3.5	.216	5.5
OSR01-03211	.185	4.7	.263	6.7
OSR01-03212	.263	6.7	.342	8.7
OSR01-04080	.059	1.5	.137	3.5
OSR01-04095	.078	2.0	.157	4.0
OSR01-04011	.177	4.5	.255	6.5
OSR01-04012	.244	6.2	.322	8.2
OSR01-04880	.039	1.0	.118	3.0
OSR01-04895	.098	2.5	.177	4.5
OSR01-04811	.157	4.0	.236	6.0
OSR01-04812	.216	5.5	.295	7.5
OSR01-04814	.276	7.0	.354	9.0
OSR01-04816	.354	9.0	.433	11.0
OSR01-04818	.433	11.0	.511	13.0
OSR01-04821	.551	14.0	.630	16.0
OSR01-06412	.157	4.0	.236	6.0
OSR01-06416	.236	6.0	.314	8.0