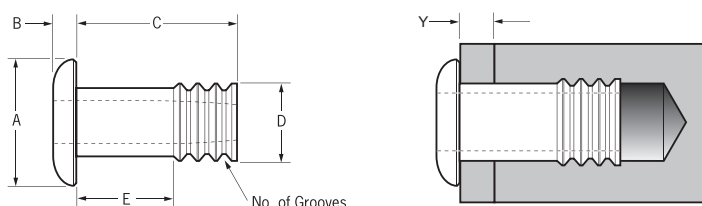






English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Low carbon steel*	Acier bas carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated, thickness 10µm Clear trivalent passivated	Revêtement zingué, épaisseur 10 µm Passivation claire trivalente	Verzinkt, 10 µm Klar chromatiert, Cr6-frei	Zincatura spessore 10µm Passivazione chiara trivalente	Zincado, 10 micras Pasivado claro trivalente

\*: SAE 1008 / EN 10263-2 C8C (DIN 10263-2 C8C, Qst 34-3)



ø	Y				A	B	C	D	E	No. of grooves/ cannelures/ Rillen / rigature / aros		Fasteners per pod/ Nombre de rivets par chargeur / Niete pro Magazin/ Rivetti per carica- tore / Uds./carga	Part No/ref
nom.	max.	min.	max.	max.	max.	max.	max.	max.	max.		kN <sup>1)</sup>	± 1	
3.2 (1/8")	3.6	3.45	3.55	5.6	1.0	8.8	3.43	3.2	3		1.2	32	01101-00410
4.0 (5/32")	2.8					7.2		1.6	3		2.2	36	01101-00508
	4.4	4.40	4.50	6.6	1.3	10.4	4.37	3.2	4			25	01101-00512
	5.2					11.9		4.8	4			22	01101-00514
4.8 (3/16")	3.2					8.0		2.4	3		2.4	31	01101-00609
	7.2	5.07	5.17	9.0	1.7	15.9	5.05	8.8	4			17	01101-00619

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas