
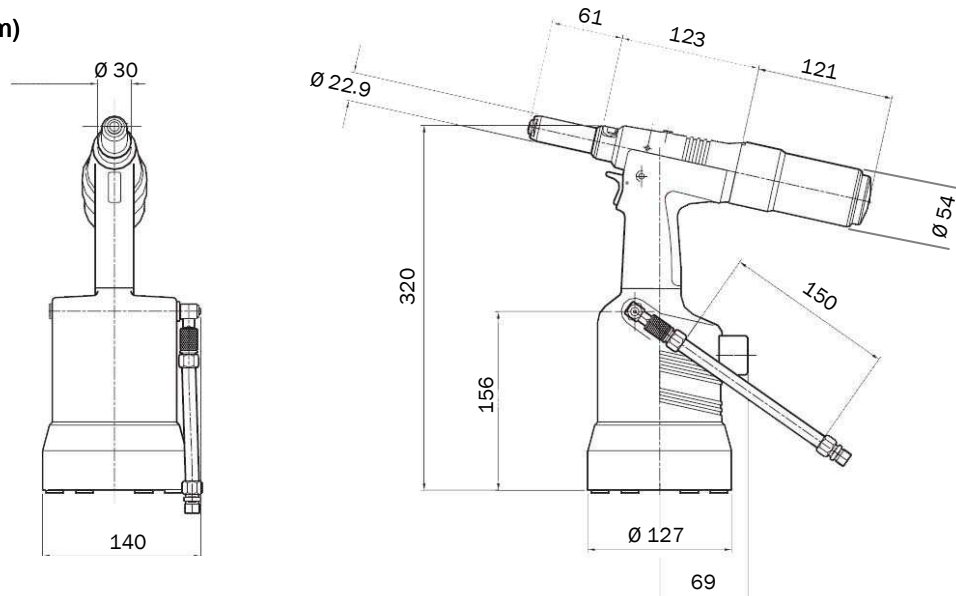


GENESIS® nG4 HYDRO PNEUMATIC TOOL

<p>Features</p> <ul style="list-style-type: none"> • Lightweight tool • Toughened plastic body and heavy duty rubber base • Quick release stem collector • Vacuum air supply cut-off on trigger • Enhanced tool life • Soft touch rubber grip on handle • Integral cycle counter <p>Benefits</p> <ul style="list-style-type: none"> • Reduces operator fatigue • High placement speed • Robust tool • Minimized air consumption • Reduced time to empty stem collector • Places a wide range of lockbolts & breakstem fasteners • Ergonomic 																			
<p>Specifications</p> <table> <tr> <td>Weight (without nose equip.)</td><td>2.28 kg (5.03 lbs)</td></tr> <tr> <td>Weight (min. with equip.)</td><td>2.36 kg (5.20 lbs)</td></tr> <tr> <td>Pull force @ 5.5 bar</td><td>18.68 kN (4200 lbf)</td></tr> <tr> <td>Stroke (min.)</td><td>17 mm (0.67 in)</td></tr> <tr> <td>Cycle time (approx.)</td><td>1.2 sec</td></tr> <tr> <td>Air supply pressure</td><td>5- 7 bar (80-100 psi)</td></tr> <tr> <td>Free air volume @ 5.5 bar</td><td>4.3 litres</td></tr> <tr> <td>Noise level</td><td><75 dB(A)</td></tr> <tr> <td>Vibration</td><td><2.5m/s²</td></tr> </table>	Weight (without nose equip.)	2.28 kg (5.03 lbs)	Weight (min. with equip.)	2.36 kg (5.20 lbs)	Pull force @ 5.5 bar	18.68 kN (4200 lbf)	Stroke (min.)	17 mm (0.67 in)	Cycle time (approx.)	1.2 sec	Air supply pressure	5- 7 bar (80-100 psi)	Free air volume @ 5.5 bar	4.3 litres	Noise level	<75 dB(A)	Vibration	<2.5m/s ²	<p>Placing capability</p> <p>Up to 6.4mm (1/4") breakstem rivets produced by TFS except Monobolt® structural rivets. Can also place:</p> <p>Avseal® II sealing plugs up to 12 mm</p> <p>Avtainer® lockbolts 9.5mm (3/8")</p> <p>Maxlok® lockbolts 4.8mm (3/16") and 6.4mm (1/4")</p> <p>Hemlok® structural rivets 6.4mm (1/4")</p>
Weight (without nose equip.)	2.28 kg (5.03 lbs)																		
Weight (min. with equip.)	2.36 kg (5.20 lbs)																		
Pull force @ 5.5 bar	18.68 kN (4200 lbf)																		
Stroke (min.)	17 mm (0.67 in)																		
Cycle time (approx.)	1.2 sec																		
Air supply pressure	5- 7 bar (80-100 psi)																		
Free air volume @ 5.5 bar	4.3 litres																		
Noise level	<75 dB(A)																		
Vibration	<2.5m/s ²																		

Dimensions (mm)



Genesis Industrial Fasteners
7/6 Dallan Place Albany, Auckland
New Zealand
09 478 6050