
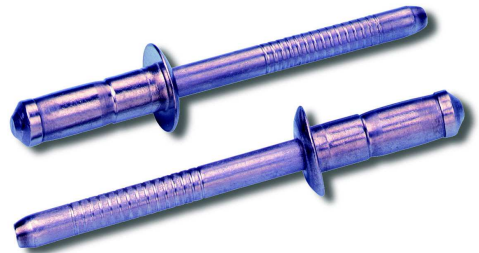


Overview

High strength stainless steel breakstem fasteners with excellent bulbing tail formation. Ideal for thin sheet materials.

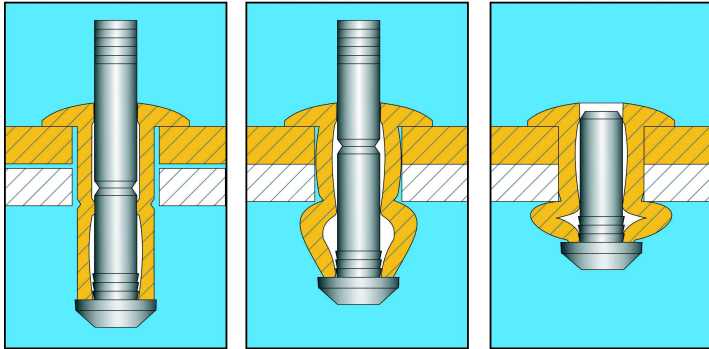

Key features and benefits

- High corrosion resistance
- High shear and tensile strength
- Good hole fill
- Provides a large blind side bearing area against the rear sheet
- Retained stem
- Ideal for applications requiring elevated temperatures
- Spreads the tail bearing load/clamp load on the rear sheet
- Ideal for use in thin sheet materials
- Compensates for irregular, oversized, slotted or misaligned holes
- Can stop movement in non-standard holes
- Provides strong, vibration resistant joints
- No damage, electrical problems or rattling due to loose stems

Assembly applications

- Automotive
- Cabinets and enclosures
- Heating and ventilating
- Telecommunications

Specifications

Sizes: 3.2mm to 4.8mm (1/8" to 3/16")
Material: Stainless steel
Headform: Dome

