


English	Français	Deutsch	Italiano	Español
Truss head	Tête large	Flachrundkopf groß	Testa larga	Cabeza alomada de perfil bajo
Pin: Medium carbon steel* Zinc plated, thickness 8 µm Clear trivalent passivated	Tige: Acier* Revêtement zingué, épaisseur 8 µm Passivation claire trivalente	Bolzen: Stahl* Verzinkt, 8 µm Klar chromatiert, Cr6-frei	Bullone: Acciaio a carbonio* Zincatura spessore 8 µm Passivazione chiara trivalente	Vástago: Acero medio al carbono* Zincado, 8 micras Pasivado claro trivalente
Collar: Low carbon steel** Zinc plated, thickness 8 µm Clear trivalent passivated	Bague: Acier bas carbone** Revêtement zingué, épaisseur 8 µm Passivation claire trivalente	Schließring: Stahl** Verzinkt, 8 µm Klar chromatiert, Cr6-frei	Collare: Acciaio a basso tenore di carbonio** Zincatura spessore 8 µm Passivazione chiara trivalente	Collar: Acero bajo en carbono** Zincado, 8 micras Pasivado claro trivalente

\*: BS 3111 Type 10, SAE 10B35, DIN 1654, 35B2 \*\*: SAE 1008 EN 10263-2 C8C

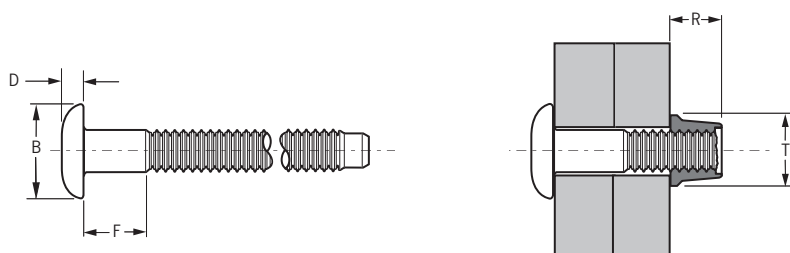

Ø				B	D	F	R	T			Part No/ref	Part No/ref
nom.	min.	max.	max.	max.	max.	ref.	max.	max.	kN <sup>1)</sup>	kN <sup>1)</sup>	Pin	Collar
4.8 (3/16")	1.6	15.9	5.16	12.0	2.9	2.3	8.7	10.1	8.25	10.01	01905-70610	01981-70600
	7.9	31.7				8.4					01905-70620	
6.4 (1/4")	1.6	15.9	6.75	15.2	3.1	2.2	13.5	13.2	11.79	16.01	01905-70810	01981-70800
	7.9	31.7				9.1					01905-70820	

all dimensions in mm / en millimètre / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas